



Features:

- ◆ Aluminum alloy with good heat dissipation
- ◆ Magic and soft lighting effect.PC Milky cover.
- ◆ High efficiency 100LM/W or 120LM/W and RA>80
- ◆ Convenient for installation
- ◆ 0.6/0.9/1.2/1.5M available
- ◆ 3 years warranty
- ◆ IP65

Applications

- ✂ Conference/Meeting rooms,Factories&Offices
- ✂ Residential / Institution Buildings
- ✂ Warehouse, Indoor/outdoor parking lot





LED TRI-PROOF LIGHT



OPTICAL CHARACTERISTICS:

Item No.	Color	Voltage	LED Type	CRI	Lumen	Dimension
20W	WW-3000K	AC200-240V	2835	>80	2000lm	46*84*600mm
20W	NW-4000K	AC200-240V	2835	>80	2000lm	46*84*600mm
20W	DW-6000K	AC200-240V	2835	>80	2000lm	46*84*600mm
30W	WW-3000K	AC200-240V	2835	>80	3000lm	46*84*900mm
30W	NW-4000K	AC200-240V	2835	>80	3000lm	46*84*900mm
30W	DW-6000K	AC200-240V	2835	>80	3000lm	46*84*900mm

TEST DATE

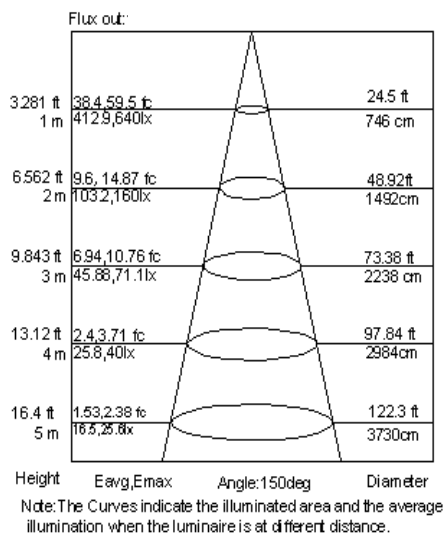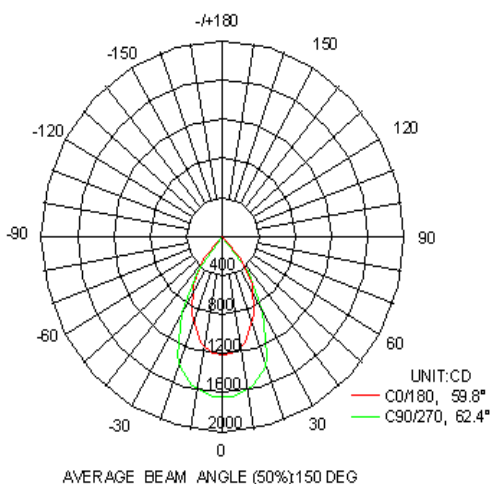

PACKAGE

Item	Inner box size	G.W
0.6m	668*89*50mm	750g
0.9m	968*89*50	1125g

LED TRI-PROOF LIGHT





OPTICAL CHARACTERISTICS:

Item No.	Color	Voltage	LED Type	CRI	Lumen	Dimension
40W	WW-3000K	AC200-240V	2835	>80	4000lm	46*84*1200mm
40W	NW-4000K	AC200-240V	2835	>80	4000lm	46*84*1200mm
40W	DW-6000K	AC200-240V	2835	>80	4000lm	46*84*1200mm
60W	WW-3000K	AC200-240V	2835	>80	6000lm	46*84*1500mm
60W	NW-4000K	AC200-240V	2835	>80	6000lm	46*84*1500mm
60W	DW-6000K	AC200-240V	2835	>80	6000lm	46*84*1500mm


TEST DATE

PACKAGE

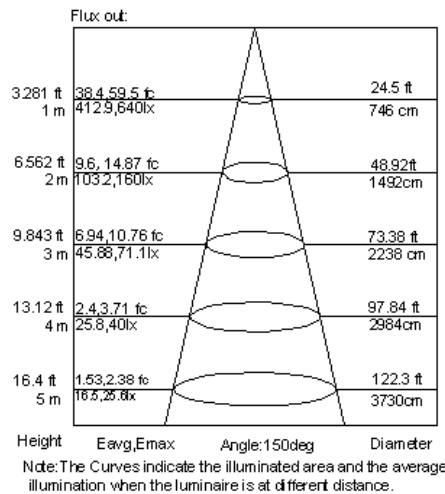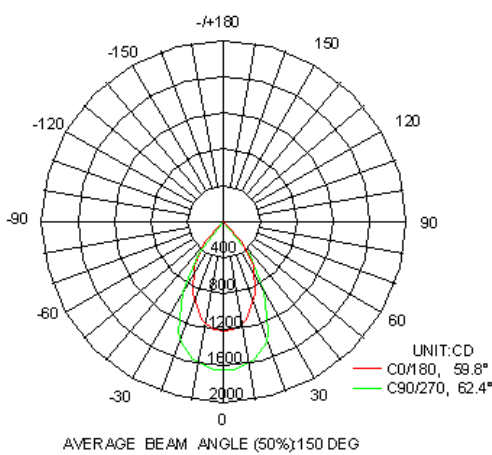


Item	Inner box size	G.W
1.2m	1298*89*50mm	1500g
1.5m	1588*89*50	1875g

INSTALLATION:

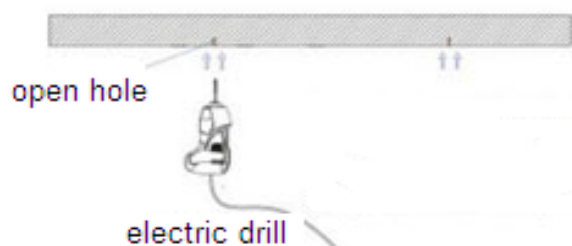


A. Make a right position for screw hole

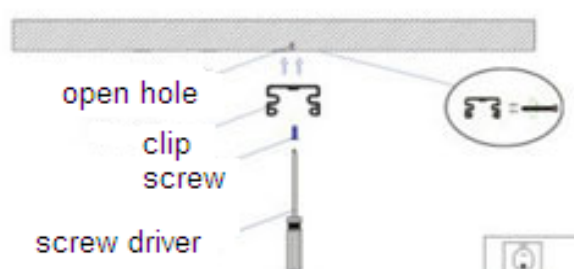

B. Screw the clip on the ceiling tightly



C. Install the lamp into the clips

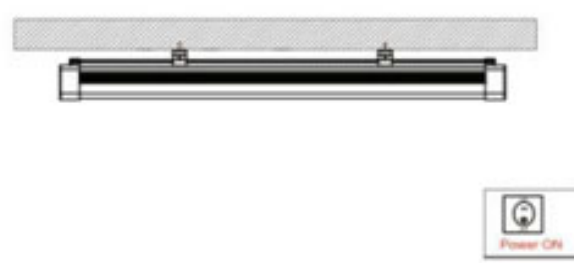

D. Adjust the position of the fixture

PACKAGE:



NOTE:

- Please power off before installation.
- Contact us when any problems happen, Never disassemble the product without permission.
- Basic electronic knowledge or professional indication is needed for operator.